Programable Tacker

PLK-G series

Images may include options.

Single Needle Lockstitch Programmable Pattern Tacker


- Large shuttle hook
- Intermittent or Continuous Feed System
- Programmable presser foot height
- On board touch screen for programming and customizing sew patterns
- Internal and USB pattern storage
- 20,000 max number of stitches per pattern
- Pattern Scaling 10-200%
- 750w Direct Drive Motor
- 220-240v 1 or 3 phase



PLK-G1010-K2



PLK-G6030

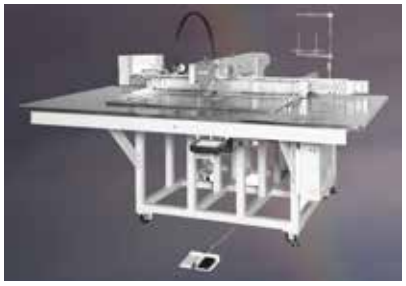

PLK-G10050



PLK-G2516

Technical Information

SPECIFICATIONS	1410MPLKG1010K2	1410MPLKG2516	1410MPLKG6030	1410MPLKG10050
Sewing Area X x Y (mm)	(X) 100 x (Y) 100	(X) 250 x (Y) 160	(X) 600 x (Y) 300	(X) 1000 x (Y) 500
Internal Pattern Storage	520			
Max Sewing Speed (RPM)	2800		2000	
Max Stitch Length (mm)	20			
Presser Foot Height (mm)	18	15	15	15
Max Work Holder Lift (mm)	25	30	30	30
Needle	135x17 size 18			

Options

- Custom Pattern tooling

www.atlatt.com • sales@atlatt.com

Atlanta Attachment Company
a Division of HSM

362 Industrial Park Drive
Lawrenceville, GA 30046
+1 (770) 963-7369

PATENTS: Our equipment may be covered by one or more patents.
Please go to the following web page for an up-to-date patent list: www.atlatt.com/patents
© 2019 Atlanta Attachment Co. 18054070719