Cutter - Panel Non-Woven

Corte - Materiales No Tejidos

Images may include options. *Las imágenes pueden incluir opciones.*



FOX MT206

Keep it Simple Spreader

- Suitable for preparation of flat spreads or regular and irregular step lays.
- Auto-Diagnosis System
- Intuitive Interface
- Optimum performance in productions with elastic or light fabrics
- Ergonomics built to safeguard operator's well-being
- Industry 4.0 Technology

Tendido Simplificado

- *Adecuada para la preparación de tendidos planos o escalonados, regulares e irregulares.*
- *Sistema de autodiagnóstico.*
- *Interfaz intuitiva.*
- *Rendimiento óptimo en producciones con telas elásticas o ligeras.*
- *Diseño ergonómico para proteger el bienestar del operador.*
- *Tecnología de la Industria 4.0.*

FOX MT206

Technical Information

OPERATION
This machine spreads fabrics faced up, in Zig Zag, or Folded.

OPTIONS

- **MT100-15-XX -** Spreading table
- **MT5-208-38-250 -** Movable End-Catcher H250 Fox 200

MODELS
- **MT206-10-250-100 -** FOX 200 H250 Spreading Machine. Capable of handling rolls weighing up to 440 pounds with a maximum width of 93 inches, for heavy-duty applications

Información Técnica

OPERACIÓN
Esta máquina extiende telas con la cara hacia arriba, en Zig Zag o Dobladas.


OPCIONES
- ***MT100-15-XX -** Mesa de extendido*
- ***MT5-208-38-250 -** Recogedor de extremo móvil H250 Fox 200.*

MODELOS
- ***MT206-10-250-100 -** Máquina de extendido FOX 200 H250. Capaz de manejar rollos de hasta 440 libras con un ancho máximo de 93 pulgadas, para aplicaciones de trabajo pesado.*



MT206 - Keep it Simple Spreader / *Tendido Simplificado*







User Friendly Interface, Drag & drop System / *Interface amigable, sistema de arrastre y posicionato*

SPECIFICATIONS / *ESPECIFICACIONES*	
Spreading Modes / *Máximo espesor de corte*	Face up, Zig Zag, Folded
Max Roll Weight (kg) / *Máximo peso de rollo*	80
Max Roll Diameter (cm) / *Máximo diametro*	60
Max Lay Height (cm) / *Altura de extendido*	20 (15 with folding device)
Voltage (v/ph/hz) / *Voltaje*	400 V 3Ph+N 50/60 Hz
Power consumption (kW) / *Consumo de energia*	3

PRODUCTION / *PRODUCCIÓN*	
Max Spreading Speed (m/min) / *Máxima velocidad de tendido*	100
Effective Spreading Width (cm) / *Ancho effectivo de tendido*	180, 230

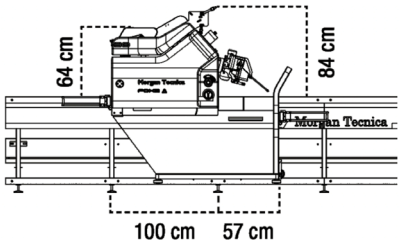

Footprint
Vista Superior



www.atlatt.com
More Info
Más Información

www.atlatt.com • sales@atlatt.com
+1 (770) 963-7369 • FAX +1 (770) 963-7641
362 Industrial Park Drive • Lawrenceville, GA 30046

PATENTS: Our equipment may be covered by one or more patents. Please go to the following web page for an up-to-date patent list: www.atlatt.com/patents © 2026 Atlanta Attachment Co. 19189021420

Atlanta Attachment Company
Sudden Service®