
Placket Fusing

Automatización - Hacer dobladillos

Images may include options. *Las imágenes pueden incluir opciones.*



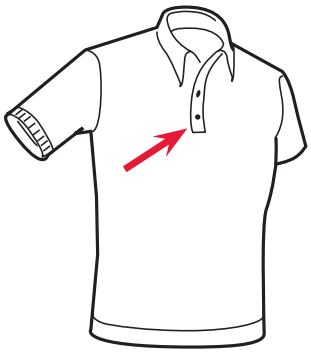

981

Automatic Placket Fusing, Cutting, and Stacking

- Plackets may be individually cut or roll fed
- Simple, easy to adjust placket attachment
- Upper and lower heating elements for faster belt speed
- Automatic cool-down cycle
- Cutter automatically cuts plackets to correct length, counts, stacks, and discards waste
- Modular design
- Modules may be purchased separately
- Use pre-slotted or plain interlining
- Plain lining slit automatically

Termofijado, Corte y Apilado Automático de Tapetas

- *Las tapetas pueden cortarse individualmente o alimentarse desde un rollo*
- *Accesorio para tapetas simple y fácil de ajustar*
- *Elementos de calor superior e inferior para mayor velocidad de banda*
- *Ciclo de enfriamiento automático*
- *El cortador corta automáticamente las tapetas a la longitud correcta, cuenta, apila y descarta los residuos*
- *Diseño modular*
- *Los módulos pueden comprarse por separado*
- *Se puede usar entretela ranurada o lisa*
- *La entretela lisa se corta automáticamente*

Technical Information

DESCRIPTION

An adjustable, easy to load, placket attachment utilizing a fusing machine that has both top and bottom heating elements for faster belt speed, an automatic cutter, stacker, and counter.

OPERATION

When using a roll feed placket, the operator loads a roll of fusing and a roll of placket material, presses the start button, and the stacker continues to run until the desired number of plackets is reached.
When using individually cut plackets, the operator loads a roll of fusing and hand loads the plackets. The fused plackets are automatically cut to the correct length, counted, stacked and the waste is cut away. The plackets are indexed when the desired quantity is reached for each stack. The automatic cutter/ stacker requires no additional attention.





Información Técnica

DESCRIPCIÓN

Un accesorio ajustable y fácil de cargar para tapetas que utiliza una máquina de termofijado con elementos calefactores superior e inferior para aumentar la velocidad de la banda. Incluye cortador automático, apilador y contador.


OPERACIÓN

Al usar tapetas con alimentación en rollo, el operador carga un rollo de entretela y un rollo de material para tapetas, presiona el botón de inicio y el apilador continúa funcionando hasta alcanzar el número deseado de tapetas.
Cuando se usan tapetas cortadas individualmente, el operador carga un rollo de entretela y coloca manualmente las tapetas. Las tapetas termofijadas se cortan automáticamente a la longitud correcta, se cuentan, se apilan y los residuos se eliminan. Las tapetas se indexan cuando se alcanza la cantidad deseada por pila. El sistema automático de corte y apilado no requiere atención adicional.

SPECIFICATIONS / *ESPECIFICACIONES*	
Voltage (v/ph/hz) / *Voltaje (v/ph/hz)*	220v 1ph
Current (amps) / *Amperaje (amperios)*	25
Air pressure (psi) / *Presión de aire (psi)*	90
Air consumption (cfm) / *Consumo de aire (cfm)*	10
Shipping weight (lbs) / *Peso de embarque (lbs)*	800
Shipping dimensions (w/l/h, inch) *Dimensiones de embarque (w/l/h, pulgadas)*	72 x 62 x 60

PRODUCTION / *PRODUCCIÓN*	
Pieces per hour - individually fed packets / *Piezas por hora - Tapetas alimentadas individualmente*	1410
Pieces per hour - continuously fed packets / *Piezas por hora - Tapetas alimentadas continuamente*	2220

Depending on material and size of parts / *Dependiendo del material y del tamaño de las piezas*

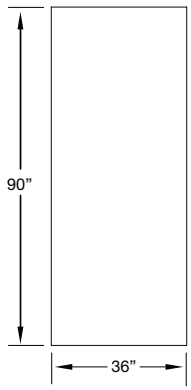

Footprint
Vista Superior

www.atlatt.com

More Info
Más Información

PATENTS: Our equipment may be covered by one or more patents.
Please go to the following web page for an up-to-date patent list: www.atlatt.com/patents.php
© 2026 Atlanta Attachment Co. 19151080719

362 Industrial Park Drive
Lawrenceville, GA 30046 USA
+1 (770) 963-7369 • FAX +1 (770) 963-7641